


# AQUASTOP

AQUASTOP® sealing system for existing leaking conduits of ducted cables and/or pipes

AQUASTOP® is based on a silicone polymer.  
NOFIRNO® sealant is based on a single component silicone compound.

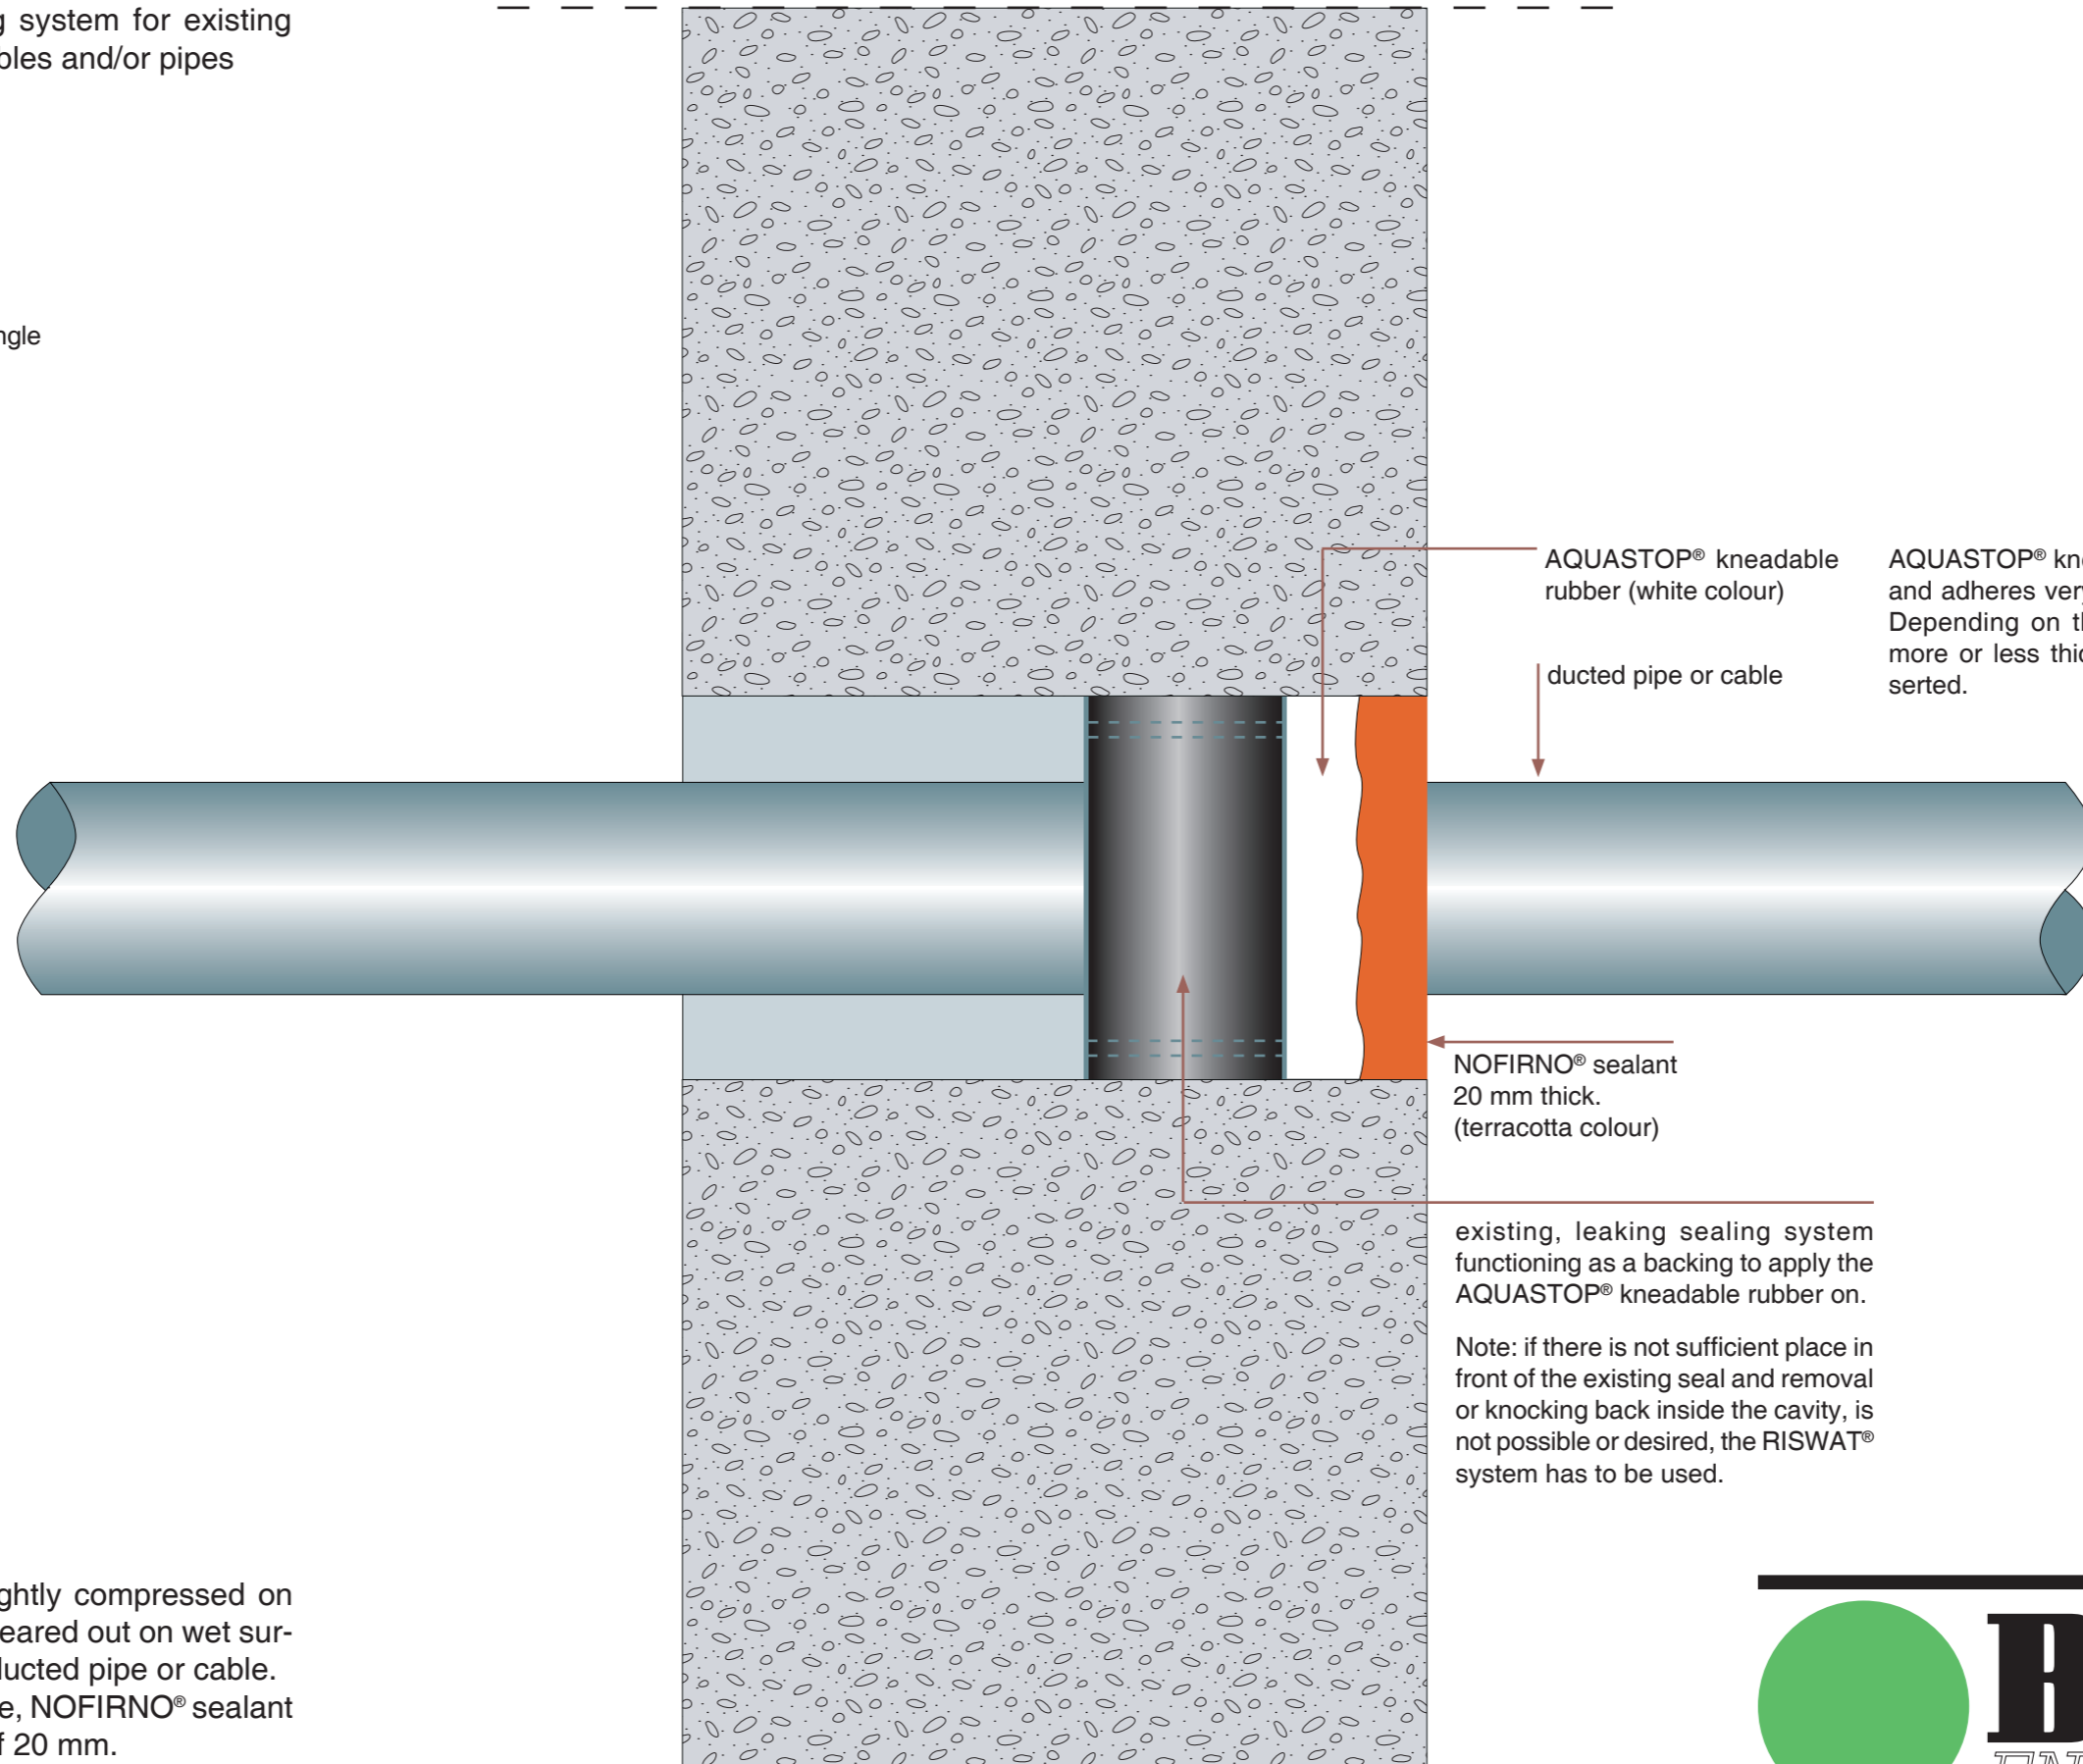

AQUASTOP® kneadable rubber is inert and adheres very well to wet surfaces. Depending on the rate of leakage, a more or less thick mass has to be inserted.

AQUASTOP® rubber to be tightly compressed on existing leaking mass and smeared out on wet surface of conduit opening and ducted pipe or cable. After drying the conduit surface, NOFIRNO® sealant to be applied in a thickness of 20 mm.

Note: if there is not sufficient place in front of the existing seal and removal or knocking back inside the cavity, is not possible or desired, the RISWAT® system has to be used.



Website: <http://www.beele.com>